


AEDONPUMP

RAPTOR 4D HEAVY

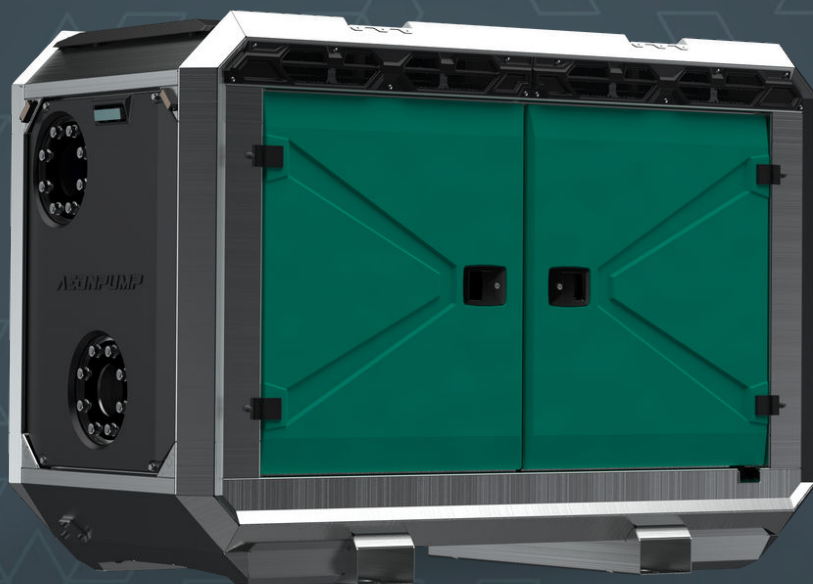

DIESEL

**DRIVEN SEWAGE
AND DEWATERING PUMP**

V2.25

FEATURES AND COMPETITIVE EDGE

Type: **Raptor 4D Heavy**

Connection size: **4 in x 4 in / 6 in x 6 in**

Frame LxWxH: **2300 x 1000 x 1400 mm / 90.6 in x 39.4 in x 55.1 in**

Dry weight: **1200 kg / 2650 lbs**

Fuel tank capacity: **200 L / 53 US gallons**



Consumption @ max rpm: **3 L/h / 0.793 gph**

Sound level: **48dB at 10 m / 33 ft**

Designed for heavy duty applications.


Sewage bypass, drainage and dewatering:

- Extended maintenance intervals;
- High-grade parts of superior quality;
- Online telemetry and remote access capability;
- Unsurpassed efficiency values that set the industry standard.

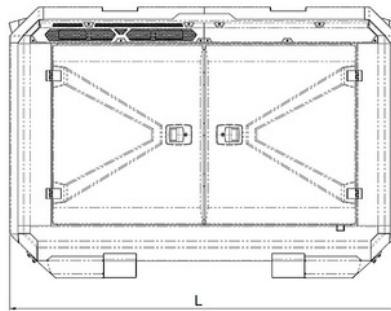

PUMP TECHNICAL SPECIFICATION

Pump Max. flow: **230 m³/h / 1013 US gpm**
 Max. head: **30 m / 98 ft / 43 PSI**
 Impeller type: **Screw impeller**
 Solids handling: **100 mm / 3.94 in**
 Temperature: **max. 40°C / max 104°F**
 Casing: **GG25 (0.6025)**
 Impeller: **GGG60 (0.7060)**
 Suction Liner: **GG20 (0.6020)**
 Suction liner adjustable by external regulation screws
 Wear Ring: **GG20 (0.6020)**
 Shaft: **1.4021**
 Shaft Sealing: **WC/SiC/NBR**
 O-Rings: **NBR**

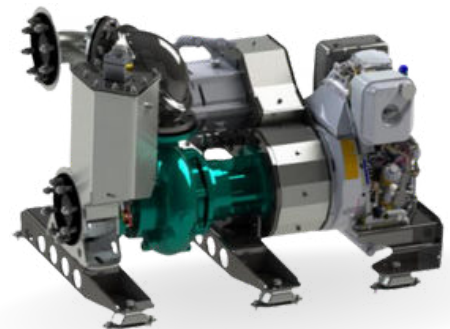



Priming System Pump type: **dry claw vacuum pump**
Air handling capacity: **60 m³/h / 35 CFM**
Max. vacuum: **9.0 m / 30 ft**
Floatbox: **Hot dip galvanized Steel**
Non-return valve: **Ductile iron GJS400**
Check valve ball: **Rubber NBR**



ENGINE OPTIONS

Standard Model: **Hatz 4H50N**
Emission standard: **Stage V/ Tier 4f**
Cylinders: **4**
Displacement litres: **1.952 L / 119.1 cu. in.**
Bore and stroke mm: **84 x 88 mm / 3.31x3.46 in**
Maximum power: **12 kW / 16.1 hp @2000 rpm**
Variable speed: **1500 - 2000 rpm**
Combustion system: **Direct injection with Bosch off-highway common-rail system**



FRAME OPTIONS

Silent canopy

Canopy type: **Stackable**
Material: **Hot dip galvanized Steel**
Dimensions LxWxH: **2300x1000x1400 mm / 90.6x39.4x55.1 in**
Lifting point: **Single lifting point**
Forklift pockets: **Installed**

**Open canopy**

Canopy type: **Stackable**
Material: **Hot dip galvanized Steel**
Dimensions LxWxH: **2300x1000x1400 mm / 90.6x39.4x55.1**
Lifting point: **Single lifting point**
Forklift pockets: **Installed**



CONTROL PANEL OPTIONS

Standard

AEONPUMP Software
Automatic level control
Hydrostatic level sensor*
SMS alarm system*
Online telemetry*
Dual float switch
Light Assistant*

* Optional




Curves at Speeds:

A 2100 rpm

B 1800 rpm

C 1500 rpm

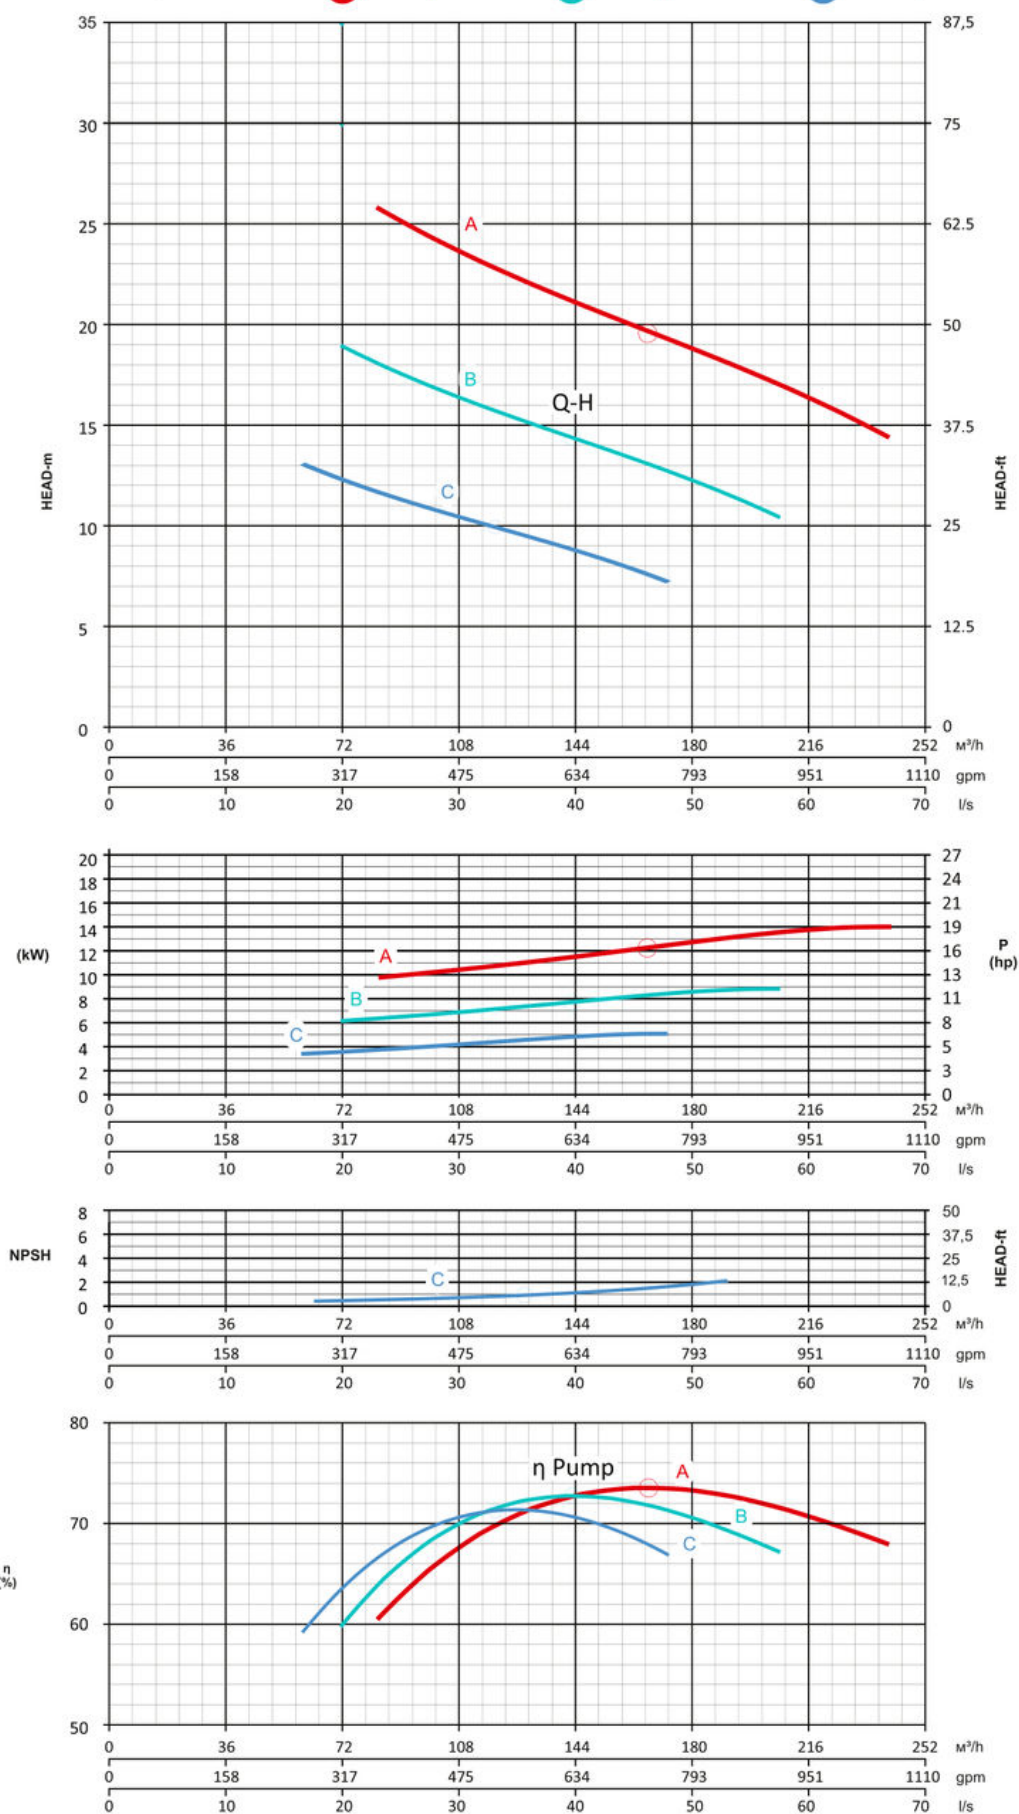

Note: Pump power P include mechanical seal friction and bearing frame losses, from a run in bearing frame.
(Testing according ISO 9906:2012-38)