


AEDONPUMP

KRAKEN 6E

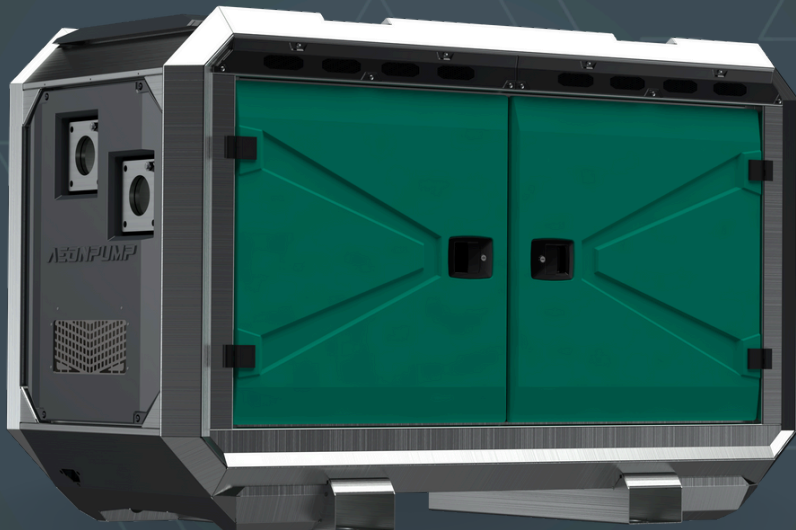

ELECTRICALLY

**DRIVEN WELLPOINT
DEWATERING PUMP**



FEATURES AND COMPETITIVE EDGE

Type: **Kraken 6E**



Connection size: **6"x 6"**

Frame LxWxH: **2000x1000x1290 mm
(78.74x39.37x50.79")**

Dry weight: **1000 kg (2205 lbs)**


Designed for heavy duty applications in Wellpoint dewatering:

- Extended maintenance intervals;
- High-grade parts of superior quality;
- Online telemetry and remote access capability;
- Unsurpassed efficiency values that set the industry standard.

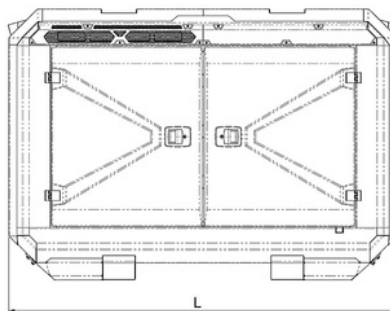

PUMP TECHNICAL SPECIFICATION

Pump Pump type: **Piston pump**
Max. flow: **95 m³/h (418 gpm)**
Max. pressure: **20 m (66 feet)**
Max. Suction: **9.6 m (32 feet)**
Connection size: **6"**
Pump body: **Alloyed cast iron**
Cylinder liners: **Stainless**
Piston cups: **Leather**
Piston rods: **Stainless steel**
Shaft seal: **Gland packing**
Valve material: **Ruber**
Stone catcher: **Galvanized steel**

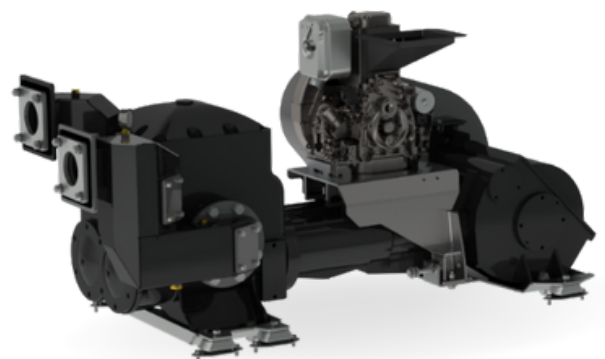



Electrical Motor Power: **5.5 kW (7.38 hp)**
Rated Voltage: **400/690V 50Hz**
4-pole: **1475 rpm**



ELECTRICAL MOTOR CONTROLLER OPTIONS

Standard Frequency converter

AEONPUMP Software
Automatic level control
Two float switch
Hydrostatic level sensor *
SMS alarm system *
Online telemetry *

*Optional



Retro Star Delta

Dual float switches
Phase control
Hour meter
Socket 125 A





FRAME OPTIONS

Open canopy

Frame or canopy: **Stackable**
Material: **Hot dip galvanized Steel**
Dimensions LxWxH: **2000x1000x1290 mm**
(78.74x39.37x50.79")
Lifting point: **Single lifting point**
Forklift pockets: **Forklift pockets**

