


**AEDONPUMP**

# KRAKEN 6D

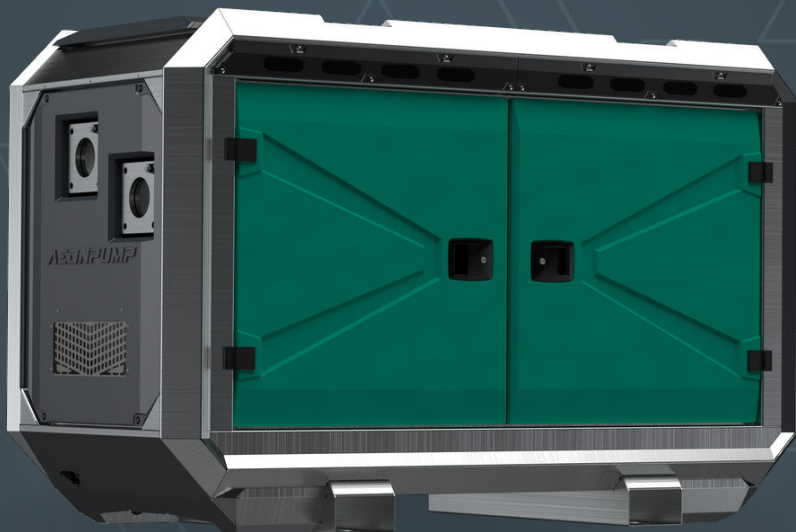

**DIESEL**

**DRIVEN WELLPOINT  
DEWATERING PUMP**



## FEATURES AND COMPETITIVE EDGE

Type: **Kraken 6D**  
Connection size: **6"**

Frame LxWxH: **2300x1000x1400 mm**  
**(90.6x39.4x55.1")**  
Dry weight: **1500 kg (3306.94 lbs)**  
Fuel tank capacity: **200 L (52.83 US gallons)**  
Sound level: **48 dB (at 10 m/at 32.8 feet)**  
Fuel consumption: **1 l/h (0.264 g/h)**


**Designed for heavy duty applications in Wellpoint dewatering:**

- Extended maintenance intervals;
- High-grade parts of superior quality;
- Online telemetry and remote access capability;
- Unsurpassed efficiency values that set the industry standard.

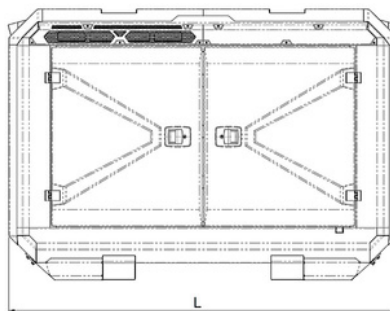

## PUMP TECHNICAL SPECIFICATION

**Pump** Pump type: **Piston pump**  
Max. flow: **95 m<sup>3</sup>/h (418 gpm)**  
Max. pressure: **20 m (65.6 feet)**  
Max. Suction: **9.6 m (31.5 feet)**  
Connection size: **6"**  
Pump body: **Alloyed cast iron**  
Cylinder liners: **Stainless**  
Piston cups: **Leather**  
Piston rods: **Stainless steel**  
Shaft seal: **Gland packing**  
Valve material: **Ruber**  
Stone catcher: **Galvanized steel**

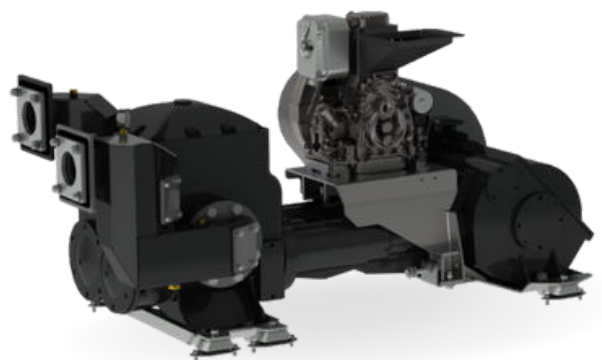

## ENGINE OPTIONS

**Standard**    Model: **Hatz 1D90E**  
Emission standard: **Stage V/ Tier 4f**  
Cylinders: **1**  
Displacement: **0.722 L (44.06 cu.in.)**  
Bore and stroke: **104 x 85 mm (4.09x3.35")**  
Maximum power: **5.5 kW (7.38 hp) @1500 rpm**  
Variable speed: **1500 - 1700 rpm**  
Combustion system: **High Pressure Mechanical Direct Injection**



## FRAME

**Silent canopy**    Frame or canopy: **Stackable**  
Material: **Hot dip galvanized Steel**  
Dimensions LxWxH: **2300x1000x1400 mm (90.6x39.4x55.1")**  
Lifting point: **Single lifting point**  
Forklift pockets: **Forklift pockets**



## CONTROL PANEL OPTIONS

**Standard**    AEONPUMP Software  
Automatic level control  
Hydrostatic level sensor\*  
SMS alarm system\*  
Online telemetry\*  
Light Assistant\*

\* Optional

