


AEDONPUMP

KRAKEN 6D

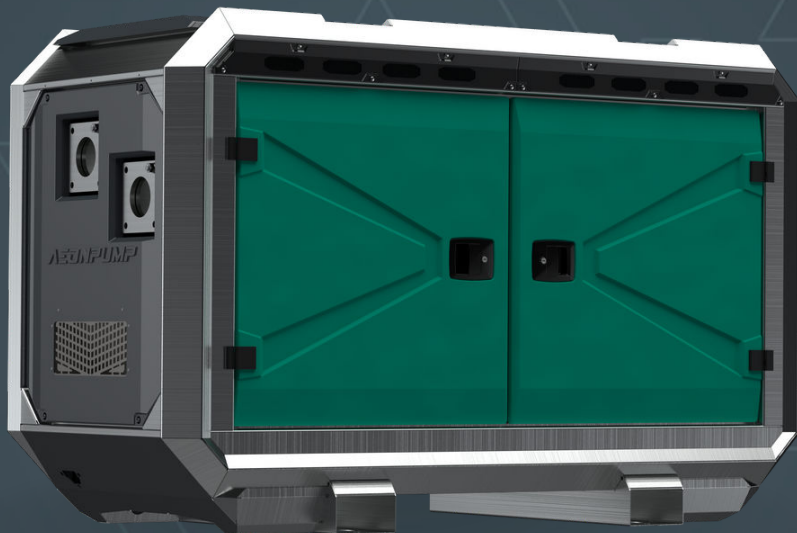

DIESEL

**DRIVEN WELLPOINT
DEWATERING PUMP**

V3.25

FEATURES AND COMPETITIVE EDGE

Type: **Kraken 6D**

Connection size: **6 in x 6 in / 4 in x 4 in**

Frame LxWxH: **2300x1000x1400 mm / 90.6x39.4x55.1 in**



Dry weight: **1500 kg / 3310 lbs**

Fuel tank capacity: **200 L / 53 US gal**

Sound level: **48 dB at 10 m / 33 ft**


Designed for heavy duty applications in Wellpoint dewatering:

- Extended maintenance intervals;
- High-grade parts of superior quality;
- Online telemetry and remote access capability;
- Unsurpassed efficiency values that set the industry standard.

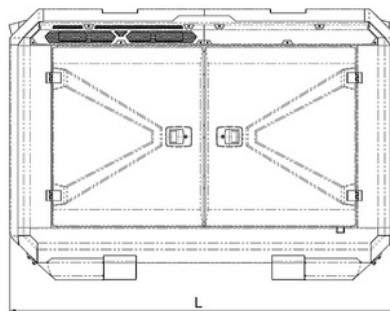

PUMP TECHNICAL SPECIFICATION

Pump Pump type: **Piston pump**
Max. flow: **95 m³/h / 418 US gpm**
Max. head: **20 m / 66 ft / 28 PSI**
Max. Suction: **9.6 m / 32 ft**
Connection size: **6 in**
Pump body: **Alloyed cast iron**
Cylinder liners: **Stainless**
Piston cups: **Leather**
Piston rods: **Stainless steel**
Shaft seal: **Gland packing**
Valve material: **Ruber**
Stone catcher: **Galvanized steel**

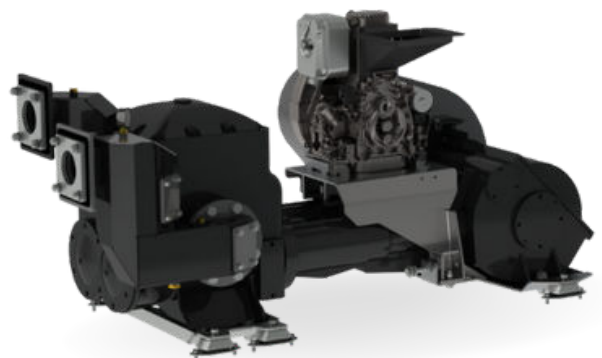



ENGINE OPTIONS

Standard Model: **Hatz 1D90E**
Emission standard: **Stage V/ Tier 4f**
Cylinders: **1**
Displacement: **0.722 L / 44.06 cu.in.**
Bore and stroke: **104 x 85 mm / 4.09x3.35 in**
Maximum power: **5.5 kW / 7.38 hp @1500 rpm**
Variable speed: **1500 - 1700 rpm**
Combustion system: **High Pressure Mechanical Direct Injection**



FRAME

Silent canopy Frame or canopy: **Stackable**
Material: **Hot dip galvanized Steel**
Dimensions LxWxH: **2300x1000x1400 mm / 90.6x39.4x55.1 in**
Lifting point: **Single lifting point**
Forklift pockets: **Forklift pockets**



CONTROL PANEL OPTIONS

Standard AEONPUMP Software
Automatic level control
Hydrostatic level sensor*
SMS alarm system*
Online telemetry*
Light Assistant*

* Optional

