


AEDONPUMP

RAPTOR 8E

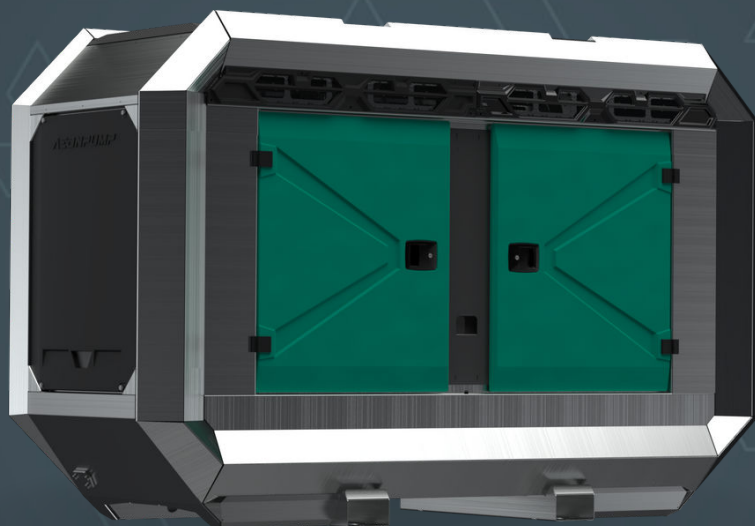

ELECTRICALLY

**DRIVEN SEWAGE
AND DEWATERING PUMP**






FEATURES AND COMPETITIVE EDGE

Type: **Raptor 8E**
Connection size: **8"**

Frame LxWxH: **2299x1100x1601 mm**
(90.51x43.31x63.03")
Dry weight: **1800 kg (3968.32 lbs)**


Designed for heavy duty applications.
Sewage bypass, drainage and dewatering:

- Extended maintenance intervals;
- High-grade parts of superior quality;
- Online telemetry and remote access capability;
- Unsurpassed efficiency values that set the industry standard.

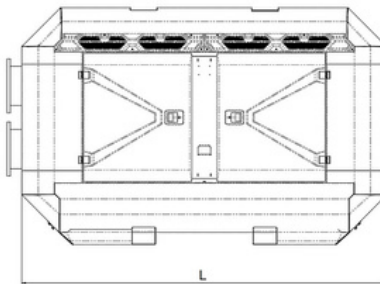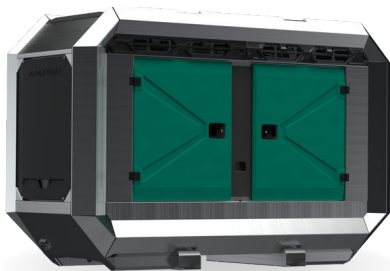

PUMP TECHNICAL SPECIFICATION

Pump Max. flow: **500 m³/h (2200 gpm)**
Max. pressure: **32 m (104.99 feet)**
Impeller type: **Screw impeller**
Solids handling: **115 mm (4.53")**
Temperature: **max. 40 °C (max 104°F)**
Wear Ring: **GG20 (0.6020)**
Shaft: **1.4021**
Shaft Sealing: **WC/SiC/NBR**
O-Rings: **NBR**
Casing: **GG25 (0.6025)**
Impeller: **GGG60 (0.7060)**
Suction Liner: **GG20 (0.6020)**
Suction liner adjustable by external regulation screws.

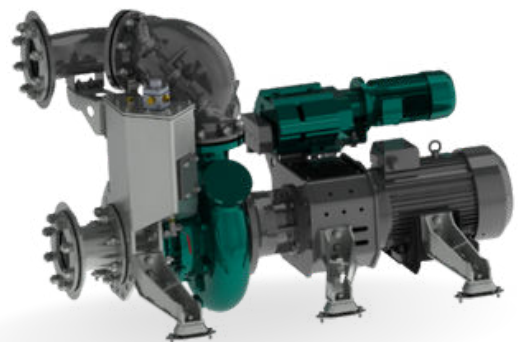



Electrical Motor Power: **18.5 kW (24.81 hp)**
Rated Voltage: **400/690V 50/60 Hz**
4-pole: **1470 RPM**



Priming System Pump type: **dry claw vacuum pump**
Air handling capacity: **60 m3/h (35 CFM)**
Max. vacuum: **9.0 m (29.5 feet)**
Electric motor: **1.3 kW (1.74 hp)**
Floatbox: **Hot dip galvanized Steel**
Non-return valve: **Ductile iron GJS400**
Check valve ball: **Rubber NBR**



ELECTRICAL MOTOR CONTROLLER OPTIONS

Standard Frequency converter

AEONPUMP Software
Automatic level control
Two float switch
Hydrostatic level sensor *
SMS alarm system *
Online telemetry *

*Optional



Retro Star Delta


Dual float switch
Phase control
Hour meter
Socket 125 A






FRAME OPTIONS

Silent Canopy Canopy type: **Stackable**
Material: **Hot dip galvanized steel**
Dimensions LxWxH: **2299x1100x1601 mm**
(**90.51x43.31x63.03"**)
Lifting point: **Single lifting point**
Forklift pockets: **Installed**

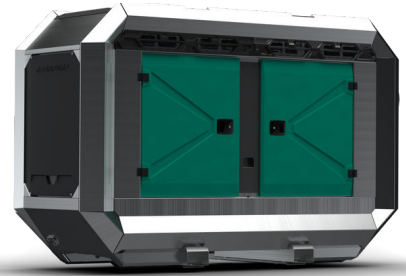


Open Canopy Canopy type: **Stackable**
Material: **Hot dip galvanized steel**
Dimensions LxWxH: **2299x1100x1601 mm**
(**90.51x43.31x63.03"**)
Lifting point: **Single lifting point**
Forklift pockets: **Installed**

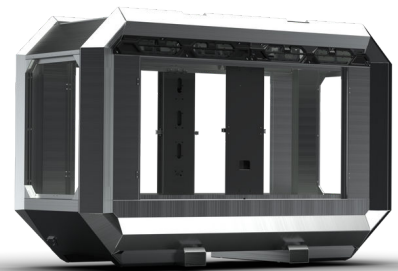



Curves at Speeds: A 1470 rpm

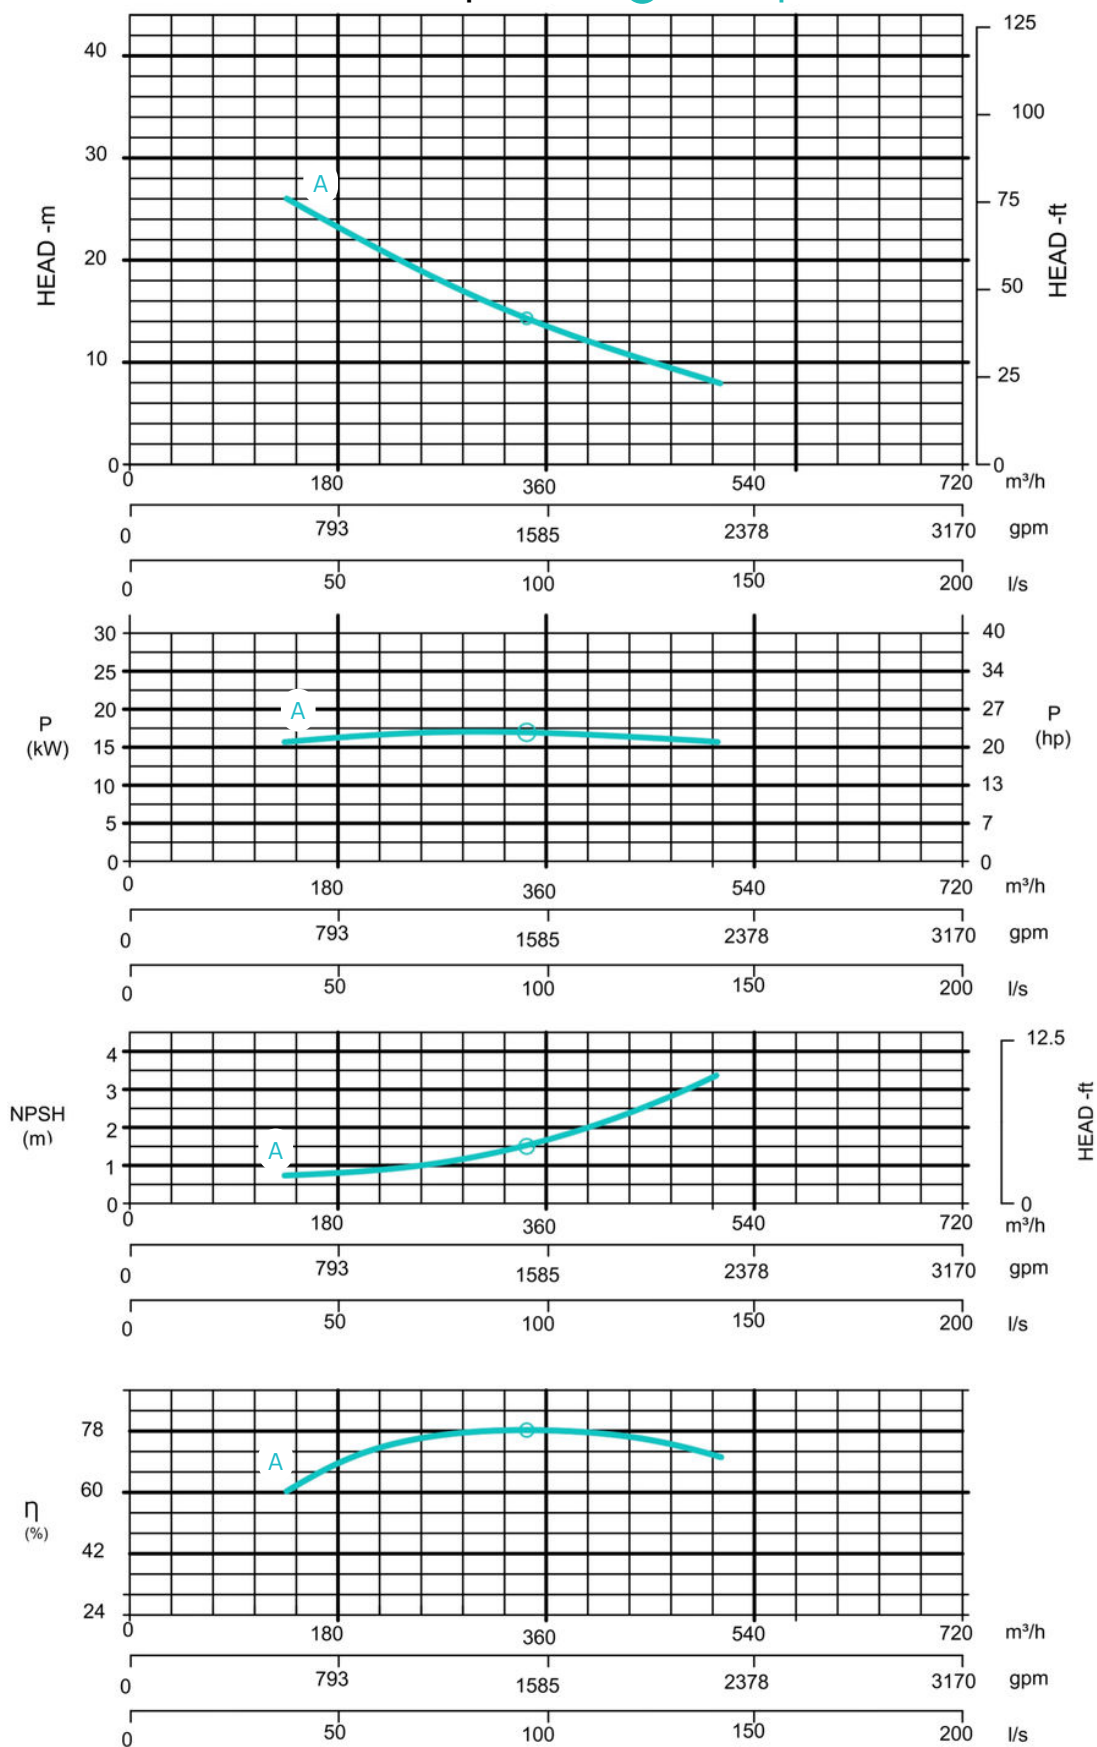

Note: Pump power P include mechanical seal friction and bearing frame losses, from a run in bearing frame.
(Testing according ISO 9906:2012-38)