

# PRORIL SAVVY SERIE

## drainage pumps



[Drainage pump](#) [Submersible pump](#)

### Description

The PRORIL SAVVY pumps are small stainless steel/plastic submersible pumps for lightly contaminated liquids. The pumps are available in a single-phase version and can be equipped with a ball float switch. The pumps are compact and lightweight. The motor of this pump is oil-free.

### Designs

Type SAVVY JUMBO: with vortex impeller for dirty water

Type SAVVY: drainage pump

Type SAVVY BASE: flat suction pump

### Applications

- o emptying wells and cellars
- o roofs
- o swimming pools
- o fountains and ponds

### Specifications


- o suitable for clean and slightly contaminated liquids and intermittent use
- o free passage of solid particles up to 35 mm
- o design: plastic with stainless steel motor housing
- o ceramic seal
- o capacity: up to 18 m<sup>3</sup>/h
- o delivery head: up to 11 mwk
- o liquid temperature: max. 35 °C
- o discharge connection: 1" and 2" internal thread
- o pump diameter: 244 mm
- o insulation class: F
- o protection class: IP68
- o 10 meter cable
- o ball float (optional)
- o motor power P2: up to 0,55 kW
- o voltage:
  - 1-phase 230V 50 Hz




## Technical data SAVVY series at 50 Hz

MODEL	DISCHARGE CONNECTION inch	POWER kW	NOM. CAPACITY m <sup>3</sup> /h	NOM. PRESSURE mwk	CAPACITY (MAX) m <sup>3</sup> /h	PRESSURE (MAX) mwk	FREE PASSAGE mm	WEIGHT kg
Savvy 300	50"	0,25	7,2	5	10,8	7,5	6	4
Savvy 600	50"	0,55	7,2	8	14,4	11	6	6

## Capacities SAVVY series at 50 Hz

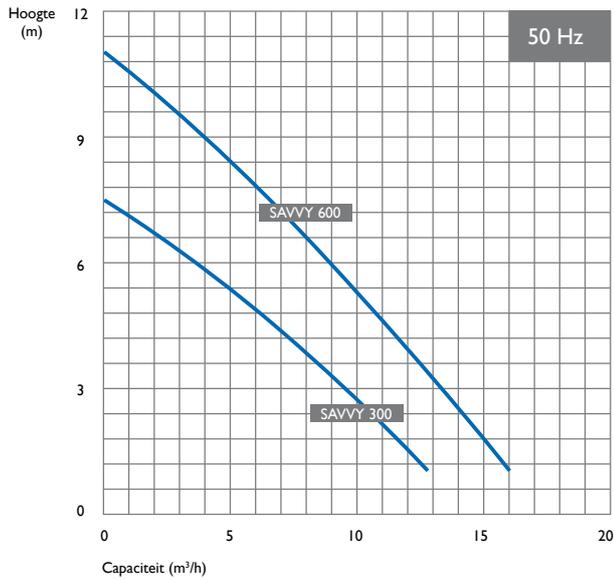

## Capacities SAVVY JUMBO at 50 Hz

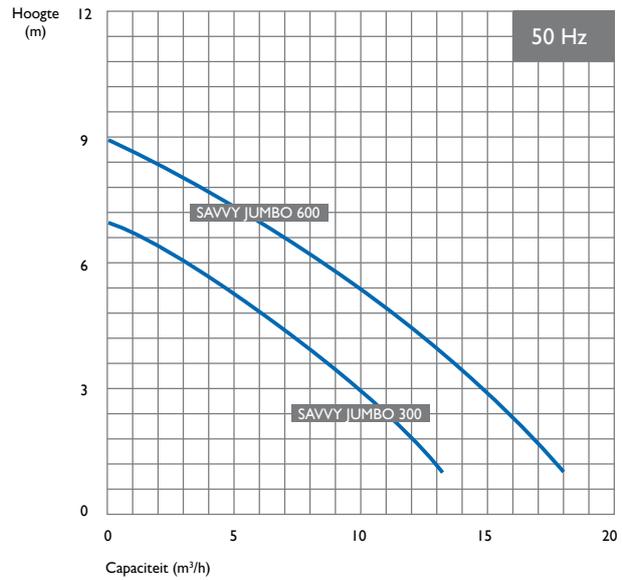

## Technical data SAVVY JUMBO at 50 Hz

MODEL	DISCHARGE CONNECTION inch	POWER kW	NOM. CAPACITY m <sup>3</sup> /h	NOM. PRESSURE mwk	CAPACITY (MAX) m <sup>3</sup> /h	PRESSURE (MAX) mwk	FREE PASSAGE mm	WEIGHT kg
Savvy jumbo 300	50"	0,25	7,2	4	14,4	7	35	4,2
Savvy jumbo 600	50"	0,55	7,2	7	18	9	35	6



## Technical data SAVVY BASE at 50 Hz

MODEL	DISCHARGE CONNECTION vinch	POWER kW	NOM. CAPACITY m <sup>3</sup> /h	NOM. PRESSURE mwk	CAPACITY (MAX) m <sup>3</sup> /h	PRESSURE (MAX) mwk	FREE PASSAGE mm	WEIGHT kg
Savvy base 300	25"	0,25	3,6	4	4,7	6,5	6	4
Savvy base 600	50"	0,55	7,2	8	10,8	11	6	4

## Capacities SAVVY BASE at 50 Hz

